

10 M LINEAR AMPLIFIER
with 26db RX Preamplifier

KL 203 P



Frequency : 20 - 30 MHz

Supply: 12 - 14 Vcc

Current drain: 8 - 10 Amp

Input power: 0.5 - 10 W AM/FM

1 - 20 W SSB

RF Output: 100 W AM/FM

200 W SSB

Input SWR: 1.1 - 1.5

Modes: AM FM SSB

Fuse : 12Amp


Electronic switching. Reverse polarity protection. Preamplifier 26dB on reception.

24 months warranty except final transistors. External and aesthetic parts and the final transistors are not included in the warranty.

The use on 27MHz CB is prohibited by most regulators.

Use this device under the rules and regulations imposed by your regulator. RM Italy (manufacturer) denies any responsibility for unlawful use by the operator.

The use of this device is not recommended when the vehicle is in motion.

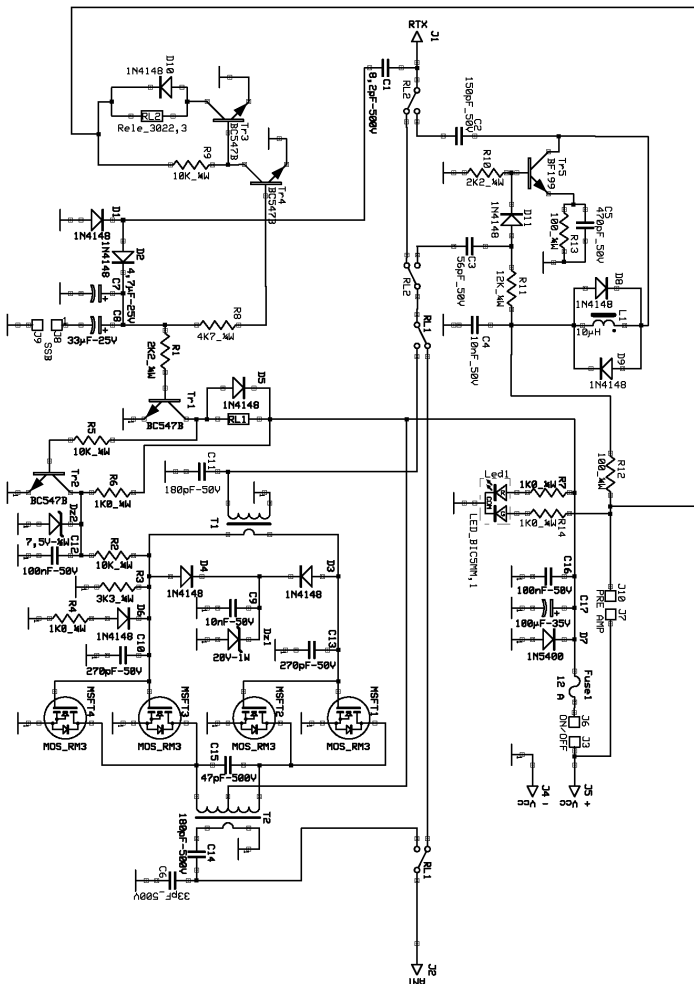

The power cord should be shorter than 3 m. with a section of at least 2 mm². If possible connect the power lead directly to the battery.

